



Highly Advanced Sensor & Optics

UV/IR Flame Detector RFD-2000X

SPECIFICATION	
<u>General</u>	
Spectral Response	Ultraviolet and Infrared
Detection Range	50ft(15m) for n-Heptane fire
Field of View	Horizontal 90° Vertical 90°
Response Characteristics	Typical 5 seconds
Temperature Range	Operating : -40°C to +75°C. Storage : -50°C to +80°C.
Humidity Range	0 to 95% relative humidity
<u>Electrical</u>	
Operating Voltage	Typical DC24V (17 to 32).
Power Consumption	1.8W maximum at 32 vdc
Wiring	14AWG(2.08mm ²) to 24AWG(0.205mm ²) shielded cable recommended.
Electromagnetic Compatibility	EMC Protected
<u>OutPut</u>	
Relays	Fire Alarm: - Form A or B Selectable - Normally de-energized - Latching/Non-latching. - Contacts rated 2A at 28 vdc. Fault Alarm - From A or B Selectable - Normally Energized - Contacts rated 2A at 28 vdc. Warning Alarm : - From A or B Selectable - Contacts rated 2A at 28 vdc

SPECIFICATION	
<u>OutPut</u>	
4-20mA	A maximum loop resistance of 500 ohms
	Fault : 0mA +0.5mA Normal : 4mA ±0.5mA IR Detection : 8mA ±0.5mA UV Detection : 12mA ±0.5mA Warning : 16mA ±0.5mA Alarm : 20mA ±0.5mA
RS-485	Proprietary communication
<u>Mechanical</u>	
Dimensions	W134 x H163 x D366 mm W5.3 x H6.41 x D14.39 Inch
Enclosure Material	Stainless steel 316
Shipping Weight	3.4 kg
Color	Metal
Conduit Entry Size	2 x 1/2 inch PF.
<u>Approvals</u>	
Performance Certification	FM3260 [Approved]
Hazardous area	[Pending] Class I Division 1 Groups B,C and D Class II Division 1 Groups E,F and G Class III
Explosion proof	ATEX, IECEx, Ex d IIB+H2 T5
Water and dust tight	IP66 [Pending]
<u>Accessories</u>	
Fire Simulator Bracket	TL205 BK-2



Highly Advanced Sensor & Optics



UV/IR Flame Detector RFD-2000X

APPLICATION

Oil&Gas Plant



General Application

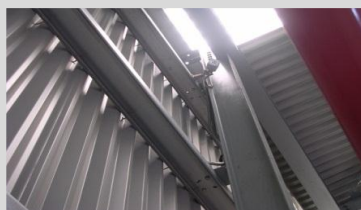

APPLICATION

Accessories



<Sun shield>



<Test Lamp_TL-205>



<Air shield>



<Bracket_BK-2>

False Alarm Immunity Tech

