



UCB

Multi-purpose Enclosure for Signaline HD/FT



Compatible with Signaline HD & FT
IP66

EOL, junction box, or interposing line unit
Resistant to most acids, alkalis & oils

Fire
detection



Signaline





Model	Signaline UCB
Dimensions	94 x 94 x 54mm
Pack weight	0.1kg
IP rating	IP66
Operating temp.	-35°C to +120°C
Mounting	Wall
Material	Polycarbonate enclosure with non-ageing polyurethane seal
Colour	Grey (RAL 7035)



The Signaline Universal Connector Box (Signaline UCB) is suitable for use with all variants of Signaline FT-68, FT-88, FT-105 and HD.

A UCB can be used as an end of line enclosure, junction box or an interposing line unit (see right). It is supplied with cable glands, 1x terminal block, 1x 470Ω resistor and 1x 680Ω resistor.


Included resistors allow Signaline FT cable to be connected directly to the zone terminals of most conventional fire control panels.

This product is not suitable for use with Signaline-185-R.


Configurations

 Signaline FT/HD
 Lead in cable


End of line enclosure*



Junction box

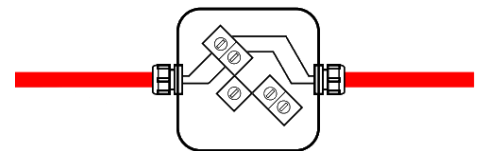

Interposing line unit (Signaline FT only)

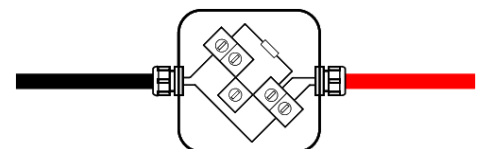

*The end of line monitoring component (such as resistor, capacitor or diode) is not included. This is normally supplied by the control panel manufacturer.

Visit Signaline.com for our full range of heat detection solutions