




Rapid Bracket Pty Ltd
 PO Box 7280
 East Brisbane, QLD 4169
info@rapidbracket.com
www.rapidbracket.com
 ACN 67 635 643 597

RAPID BRACKET – Model: RBVDHFR-RBVDH3M

Features

- Eliminates the need for access panels
- Ultra-light weight
- 165mm Ø cutout for easy access to concealed cables
- Simple assembly straight from the box
- Less time working above your head
- High quality components
- Aesthetically pleasing finish
- Simplifies detection maintenance

Information

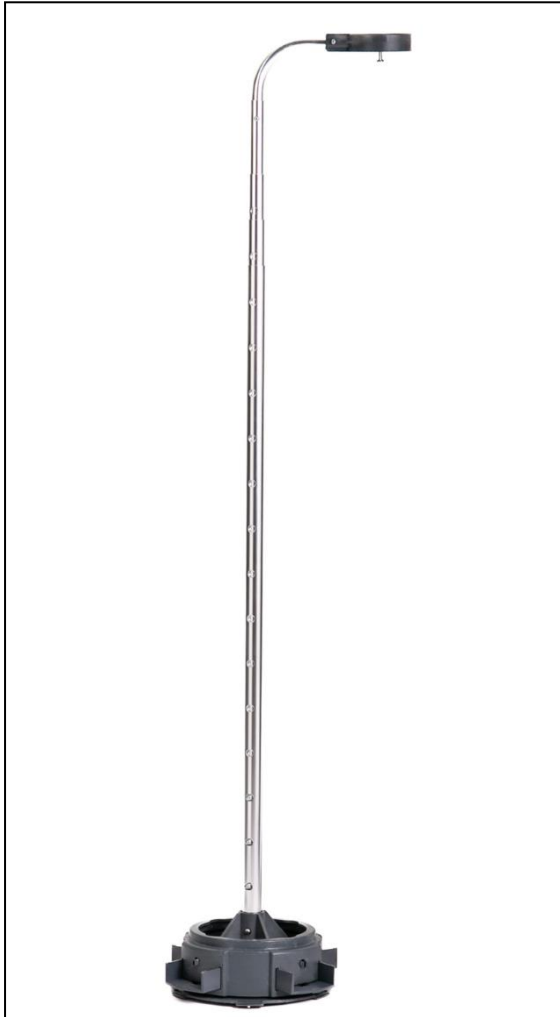

Product code	RBVDHFR-RBVDH3M
Cut out size	165mm Ø
Weight	1.19kg
Installation type	Recessed with 165mmØ flush face
Maximum Height	3000mm (3 meters)
Minimum Height	1050mm
Maximum detector diameter	128mm
Installation material thickness	9mm to 32mm
Maximum detector weight	500g
Maximum cable weight	1000g
Cover plate finish	UV resistant white
Fire retardant	YES
Halogen free	YES
CE/UKCA	YES
ROHS	YES
REACH	YES
Australian made	YES
Patented	YES
Trademarked	YES
Fit for purpose	YES
MATERIALS	
Assembly	Nylon, ABS/PC
Tubes	Aluminium

Description

The Patented Rapid Bracket® Void Detector Holder allows the installation of fire detectors into inaccessible ceiling spaces from 550mm to 3000mm in height. Ceiling type thicknesses can range between 9mm and 32mm.

The Rapid Bracket® is compatible with detectors up to 128mm diameter and is specifically designed for ease of installation and future maintenance of detectors.

The information contained in the document is current as of 01/01/2024. Rapid Bracket Pty Ltd reserves the right to change the information contained in this document without notice. In support of our policy of continuous improvement, we reserve the right to change materials and specifications without notice. To ensure you have the most up to date information, contact support@rapidbracket.com

